



TAKE-OVER VALVE (BRASS)

PRISEO SERIES

Vidéo de montage

DESCRIPTION


- Brass body compliant to NF EN 1216X standard
- Anti-clockwise or clockwise closing
- Brass sphere nickel covered
- Pressure's test: 24 Bars
- A.C.S certified product
- Sealing test according to the standard NF EN 13828
- Pulling test according to the standard NF EN ISO 3503 and ISO 17885:2015

Cast Iron square
(30 x 30mm)

Brass body
CW 614/617

Compression fitting with a
hole for sealing wire

PULLING TEST




All compression fittings are tested according to standard NF EN ISO 3503 and ISO 17885: 2015

SEALING TEST



All valve are tested according to standard NF EN ISO 13828, Test validated by C.S.T.B

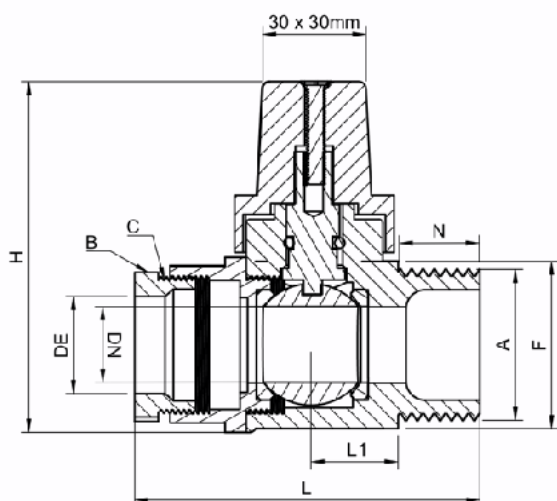

Ref	DN	PE	A	B mm	C mm	F mm	H mm	L mm	L1 mm	N mm	Weight
RPF320	20	25	PB	34	M34 x 1,5	40	96	91	22	22	0,75 kg
RPF325	25	32	PB	44	M42 x 2	43	96	98	22.5	22	0,83 kg
RPF325GB	25	32	GB	44	M42 x 2	55	100	101	26.5	22	0,90 kg
RPF332	32	40	GB	50	M50 X 1,5	56	115	121	32.5	25	1,30 kg
RPF340	40	50	GB	65	M62 x 2	65.5	127	123	29.5	25	1,60 kg