

TAKE-OVER VALVE (VERTICAL MODEL)

SERIE PRISEO

DESCRIPTION


- Brass body compliant to NF EN 1216X standard
- Anti-clockwise or clockwise closing
- Brass sphere nickel covered
- Pressure's test: 24 Bars
- A.C.S certified product
- Sealing test according to the standard NF EN 13828
- Pulling test according to the standard NF EN ISO 3503 and ISO 17885:2015

Cast Iron square
(30 x 30mm)

Brass body
CW 614/617


Compression fitting with a
hole for sealing wire

PULLING TEST

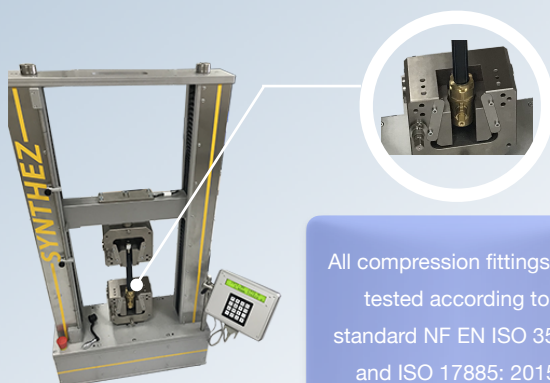


All compression fittings are
tested according to
standard NF EN ISO 3503
and ISO 17885: 2015

SEALING TEST

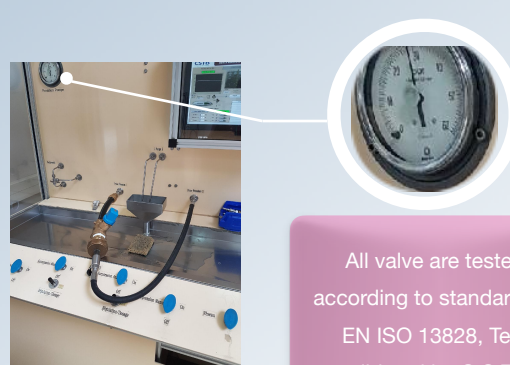

All valve are tested
according to standard NF
EN ISO 13828, Test
validated by C.S.T.B

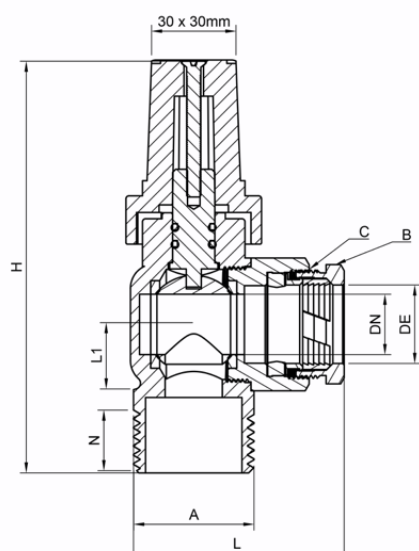

Réf	DN	PE	A	C	L mm	L1 mm	N mm	H mm	Weight
RPFV20	20	25	PB	M34 x 1,5	71	28	22	138	0,75 kg
RPFV25	25	32	PB	M42 x 2	79	28	22	141	0,83 kg
RPFV32	32	40	GB	M50 X 1,5	98,5	38	25	153	1,30 kg
RPFV40	40	50	GB	M62 x 2	115	43	25	174	1,60 kg