

AXIAL CHECK VALVE


CONTROL VALVE



DESCRIPTION

- Ductile iron body
- Blue epoxy anti-corrosion surface coating
- Nominal pressure: 16 Bars
- ISO PN10 and PN16 drilled flanges until DN150, from DN200, ISO PN10 or PN16 drilling, to be specified
- A.C.S certified product

Ref	DN	H (mm)	Ø flanged (mm)	Weight
CAD101	80	140	200	15,00 kg
CAD102	100	170	220	20,00 kg
CAD103	125	200	250	27,00 kg
CAD104	150	230	285	35,00 kg
CAD105	200	288	340	60,00 kg
CAD106	300	410	460	110,00 kg

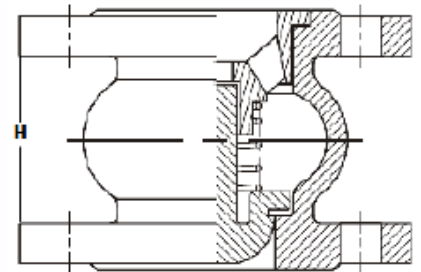

FILTER

- Inox 304
- ISO PN10 and PN16 drilled flanges until DN150, from DN200, ISO PN10 or PN16 drilling, to be specified

DN	B (mm)
80	148
100	168
125	198
150	222
200	278
300	384